




ALTURA DA FÔRMA	ESPESSURA DA LÂMINA	ALTURA TOTAL	LARGURA DA NERVURA			ÁREA DA SEÇÃO	DISTÂNCIA DO C.G. à		INÉRCIA		VOLUME DO VAZIO		PESO PRÓPRIO	VOLUME DE CONCRETO
			INFERIOR	SUPERIOR	MÉDIA		FACE SUPERIOR	FACE INFERIOR	INÉRCIA P/ NERV.	ALTURA EQUIVALENTE				
cm	cm	cm	cm	cm	cm	cm²	cm	cm	cm ⁴	cm	m³	m³/m²	kN /m²	m³/m²
22,5	5,0	27,5	12,5	18,1	15,3	644	9,5	18,0	42351	20,4	0,105	0,156	2,98	0,119
	7,5	30,0				794	10,0	20,0	58776	22,7			3,60	0,144
	10,0	32,5				944	10,7	21,8	72363	24,4			4,23	0,169
32,5	5,0	37,5	12,5	20,6	16,6	838	13,7	23,8	108773	27,9	0,147	0,216	3,98	0,159
	7,5	40,0				988	13,9	26,1	135256	30,0			4,60	0,184
	10,0	42,5				1138	14,4	28,1	164000	32,0			5,23	0,209
42,5	5,0	47,5	12,5	23,1	17,8	1057	18,0	29,5	200453	34,2	0,184	0,272	5,10	0,204
	7,5	50,0				1207	18,1	31,9	249191	36,8			5,73	0,229
	10,0	52,5				1357	18,5	34,0	299250	39,1			6,35	0,254
d1	ds	D	bi	bs	br	A	rs	ri	I	heq	V/V		CONCRETO 25kN/m³	




* Complementar com elemento de apoio das fôrmas de 7,5 cm de largura (det.2)




Meia fôrma (para completar onde não couber fôrma inteira)

Atex 600U pode ser combinada com os produtos abaixo:


RÉGUA LINEAR 7*



**Comprimento 1,5m com apoio para o Cabetex.

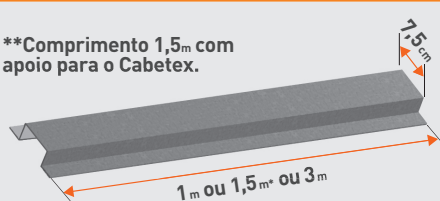

CABETEX 7,5*



RÉGUA LINEAR COMPLEMENTAR 7,5*

